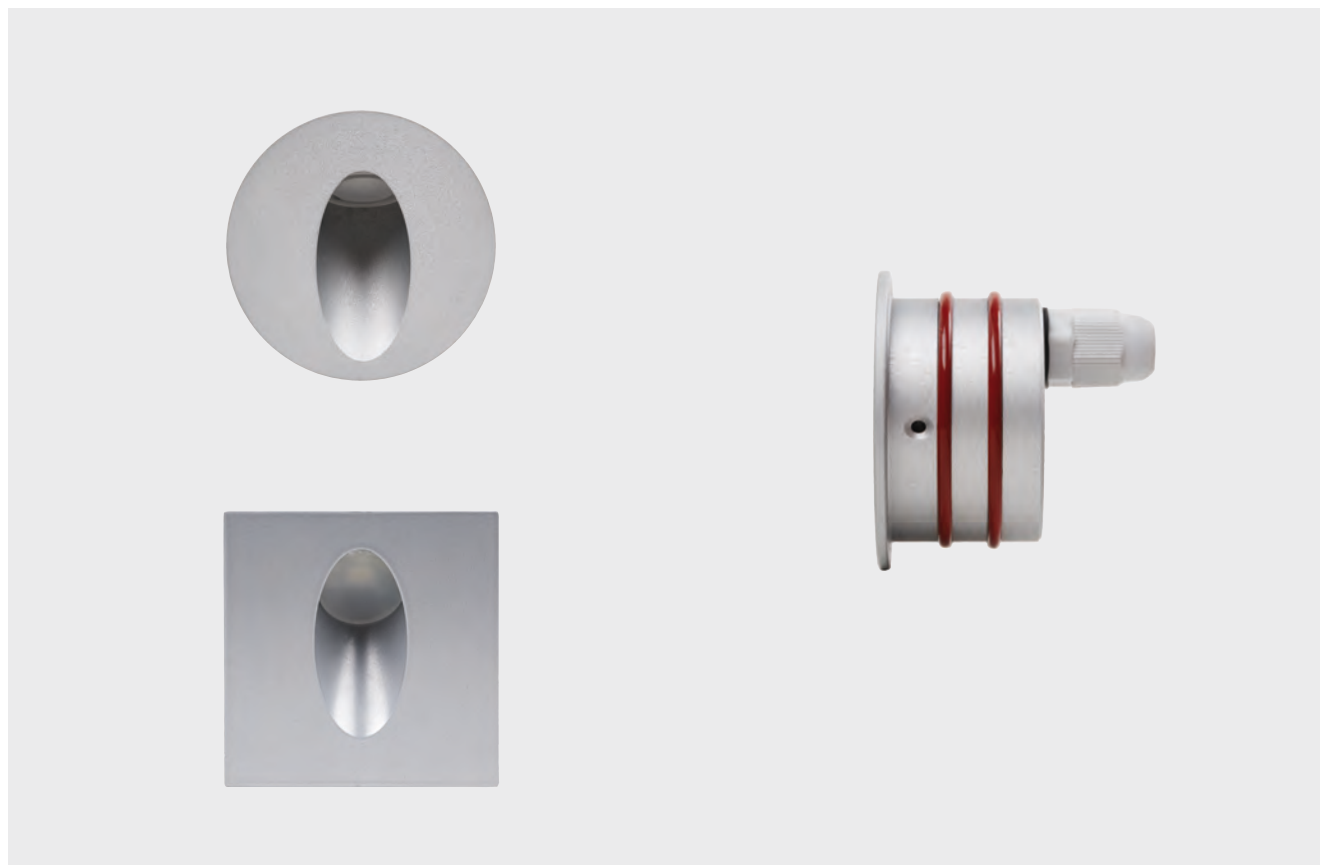


TANGO R/S


CE IP66 CLIII
**Installation**

Recessed wall luminaire for indoor and outdoor installation. Tango can be installed in concrete walls with a plastic housing or in plasterboard walls with springs.

Technical description

Body made of machined and anodized aluminum. Also available powder painted with RAL colour. High quality LED.

Electrical features

Remote power supply not included.
Class III device.

Source type**Luminaire wattage****Colour temperature****CRI****Beam****Driver****Input Current****Protection class****IP rating****Weight****Dimensions**

Power LED

1W - 2.1W

2700K - 3000K - 4000K

80 - on request 90

Asymmetric

Remote

Max 700 mA

CLIII

IP66

0.35 kg

Ø 65 x h 47

**ATANGOF01 - Standard Housing**

Straight housing made of PVC for concrete wall.

**ATANGOF02 - Stainless steel spring**

Pair of springs for plasterboard wall.

TANGO R/S 1W

 **CE IP66 CLIII**




Product codes

Code	W	Shape	Lm	K	CRI
ATANGOR11Y	1	round	130	2700	80
ATANGOR11W	1	round	135	3000	80
ATANGOR11N	1	round	135	4000	80
ATANGOS11Y	1	square	130	2700	80
ATANGOS11W	1	square	135	3000	80
ATANGOS11N	1	square	135	4000	80

+ Finishing codes


Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
WP	White powder painted
GP	Grey RAL 9006 powder painted
BP	Black powder painted

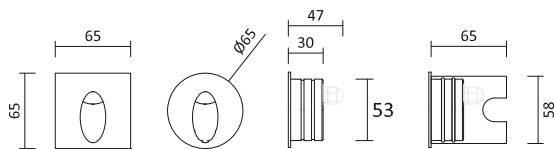

+ Fixing accesories

Code	Description
FSPB	Springs for plasterboard wall
FOR	O-Ring for recessed housing

Asym 1W

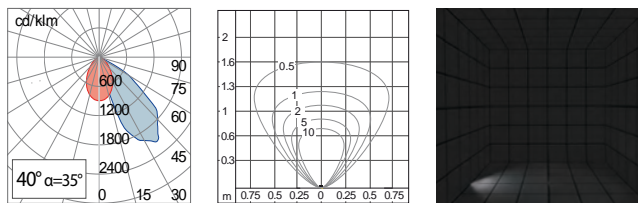

+ Power supply codes

Code	Power supply type
ST0350	Standard - 350 mA
DI0350	DIM1-10 - 350 mA
DA0350	DIM DALI - 350 mA

RGB version available 

TANGO R/S 2,1W

F **CE** **IP66** **CLIII**




Product codes

Code	W	Shape	Lm	K	CRI
ATANGOR31Y	2,1	round	210	2700	80
ATANGOR31W	2,1	round	225	3000	80
ATANGOR31N	2,1	round	225	4000	80
ATANGOS31Y	2,1	square	210	2700	80
ATANGOS31W	2,1	square	225	3000	80
ATANGOS31N	2,1	square	225	4000	80

+ Finishing codes


Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
WP	White powder painted
GP	Grey RAL 9006 powder painted
BP	Black powder painted

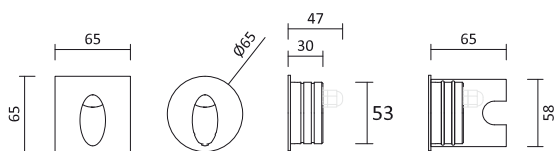

+ Fixing accessories

Code	Description
FSPR	Springs for plasterboard wall
FOR	O-Ring for recessed housing

Asym 2.1W

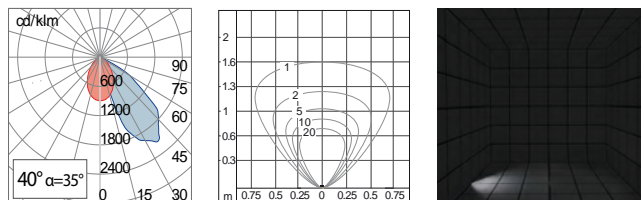

+ Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA

RGB version available



TANGO R / Private residence, Milan

Tassoni & Pesenti