


CS130 S

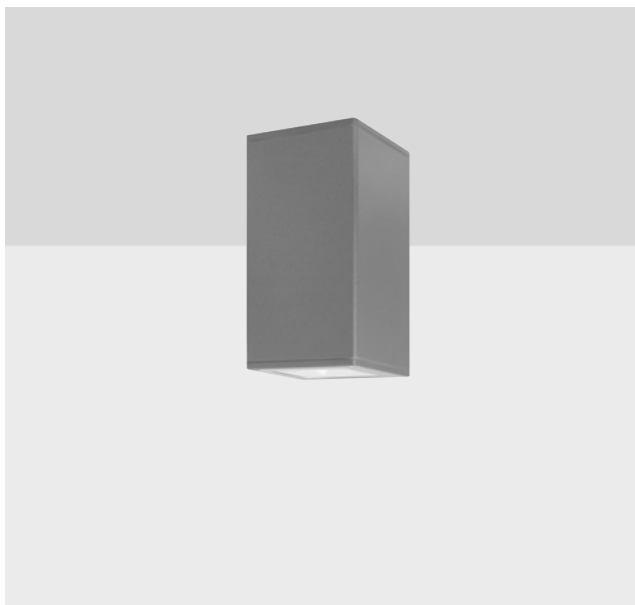

Product codes double emission CS130 13W, 19W & 27W

Code	W	Optic	Lm	Beam
ACS130S11	13	15°	1720	80
ACS130S12	13	55°	1685	80
ACS130S14	13	75°	1705	80
ACS130S21	19	15°	2385	80
ACS130S22	19	55°	2335	80
ACS130S24	19	75°	2360	80
ACS130S31	27	15°	3165	80
ACS130S32	27	55°	3095	80
ACS130S34	27	75°	3130	80

+ Colour temperature codes

Code	Description
Y	2700K
W	3000K
N	4000K

+ Finishing codes

Code	Description
NA	Natural anodized aluminium
BA	Black anodized aluminium
GP	Grey RAL9006 powder painted
SP	Sable noir powder painted
WP	White powder painted

+ Power supply codes 13W




Code	Power supply type
ST0350	Standard - 350 mA
DI0350	DIM1-10 - 350 mA
DA0350	DIM DALI - 350 mA

+ Power supply codes 19W

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA

+ Power supply codes 27W




Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA

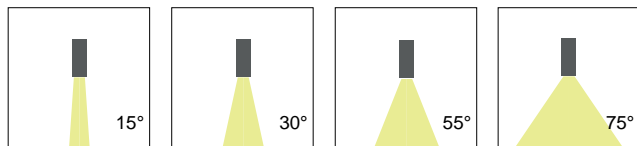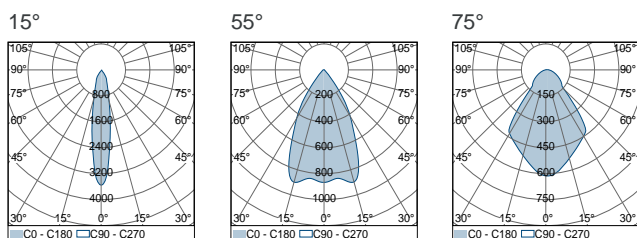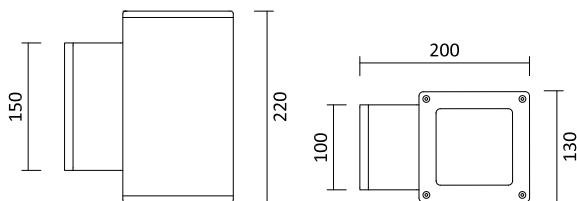

Other optics available

CS180 S

CE IP66 CLI/II F

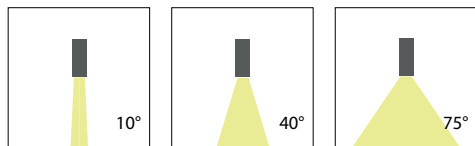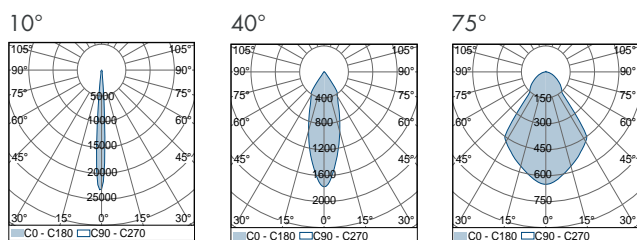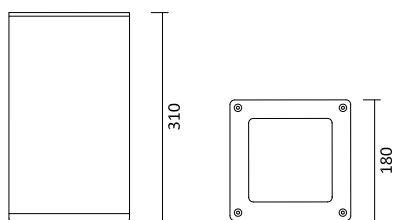

Other optics available

Product codes double emission CS180 26W & 33W

Code	W	Optic	Lm	Beam
ACS180S11	26	15°	3485	80
ACS180S12	26	40°	3150	80
ACS180S14	26	75°	3450	80
ACS180S21	33	15°	4340	80
ACS180S22	33	40°	3920	80
ACS180S24	33	75°	4295	80

+ Color temperature codes

Code	Description
Y	2700K
W	3000K
N	4000K

+ Finishing codes

Code	Description
NA	Natural anodized aluminium
BA	Black anodized aluminium
GP	Grey RAL9006 powder painted
SP	Sable noir powder painted
WP	White powder painted

+ Power supply codes 20W

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA

+ Power supply codes 30W

Code	Power supply type
ST0900	Standard - 900 mA
DI0900	DIM1-10 - 900 mA
DA0900	DIM DALI - 900 mA