

Luxy Micro

CE IP65 CLIII 



Installation

Ceiling recessed luminaire for indoor and outdoor installation.

Technical description

Body made of machined and anodized aluminum.
Front ring made of machined aluminum, natural or black anodized or painted with polyester powder. Stainless steel front ring upon request.
Harmonic stainless steel springs for installation in false ceiling.
High quality power LED.

Electrical Features

Remote power supply not included.
Class III device.

Source type

Luminaire wattage

Colour temperature

CRI

Beam

Driver

Input current

Protection class

IP rating

Weight

Dimensions

Power LED

1W - 2.1W

2700K - 3000K - 4000K

80 - on request 90

11° - 32° - 11x26°

Remote

Max 700 mA

CLIII



IP65

0.15 kg

Ø 44 x h 67

Luxy Micro 1W

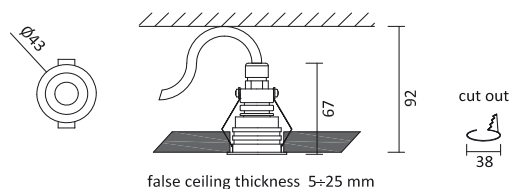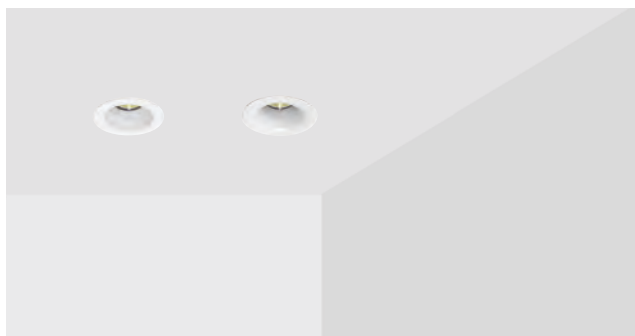

CE IP65 CLIII 




Product codes

Code	W	Optic	Lm	K	CRI
ALUXYMF11Y	1	11°	115	2700	80
ALUXYMF11W	1	11°	120	3000	80
ALUXYMF11N	1	11°	120	4000	80
ALUXYMF13Y	1	32°	130	2700	80
ALUXYMF13W	1	32°	135	3000	80
ALUXYMF13N	1	32°	135	4000	80
ALUXYMF14Y	1	11X26°	125	2700	80
ALUXYMF14W	1	11X26°	130	3000	80
ALUXYMF14N	1	11X26°	130	4000	80


+ Finishing codes

Code	EDG	SMT
Description		
	Edged front ring	Smoothed front ring


11° 1W

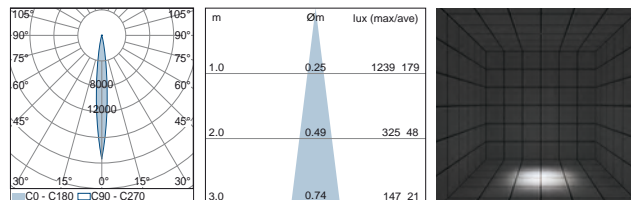

32° 1W

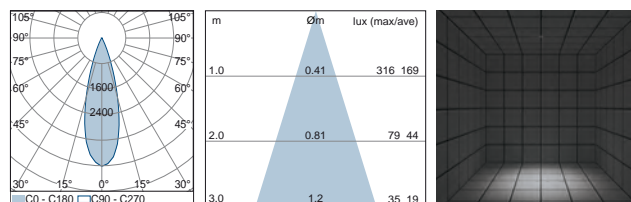

11X26° 1W

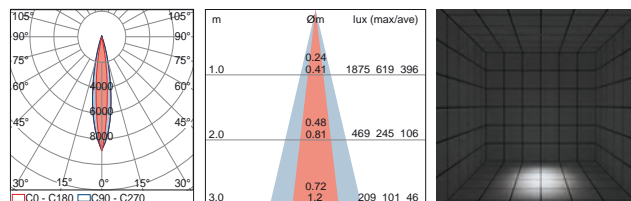

+ Finishing codes



Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
SI	Satin Inox
BP	Black powder painted
WP	White powder painted
GP	Gold finish

+ Power supply codes

Code	Power supply type
ST0350	Standard - 350 mA
DI0350	DIM1-10 - 350 mA
DA0350	DIM DALI - 350 mA

Luxy Micro 2.1W

CE IP65 CLIII

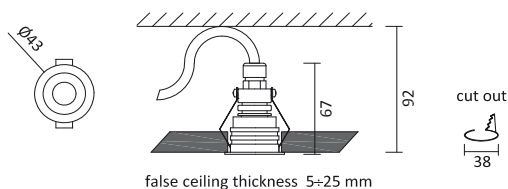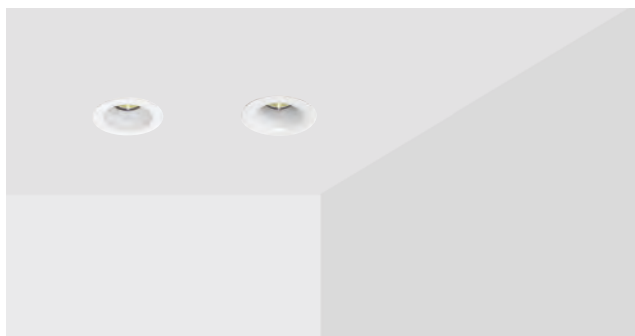


Product codes

Code	W	Optic	Lm	K	CRI
ALUXYMF31Y	2.1	11°	195	2700	80
ALUXYMF31W	2.1	11°	210	3000	80
ALUXYMF31N	2.1	11°	210	4000	80
ALUXYMF33Y	2.1	32°	220	2700	80
ALUXYMF33W	2.1	32°	235	3000	80
ALUXYMF33N	2.1	32°	235	4000	80
ALUXYMF34Y	2.1	11X26°	210	2700	80
ALUXYMF34W	2.1	11X26°	225	3000	80
ALUXYMF34N	2.1	11X26°	225	4000	80


+ Finishing codes

Code	EDG	SMT
Description		
	Edged front ring	Smoothed front ring


11° 2.1W

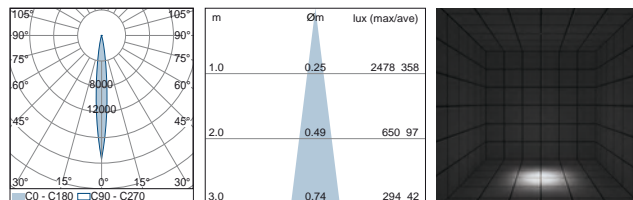

32° 2.1W

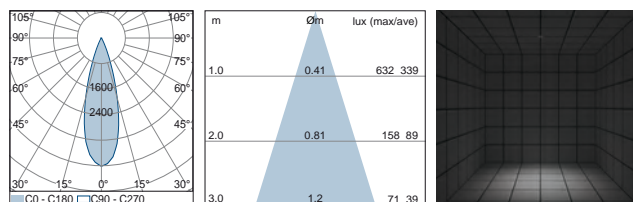

11X26° 2.1W

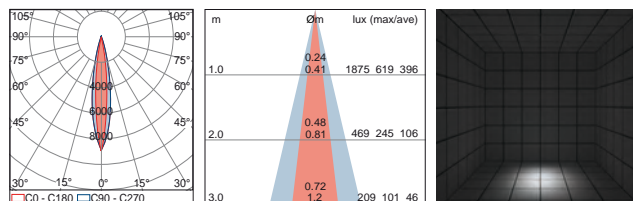

+ Finishing codes

Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
SI	Satin Inox
BP	Black powder painted
WP	White powder painted
GP	Gold finish

+ Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA



Luxy Micro / Hotel, Singapore