


Luxy Pico

CE IP20 CLIII 

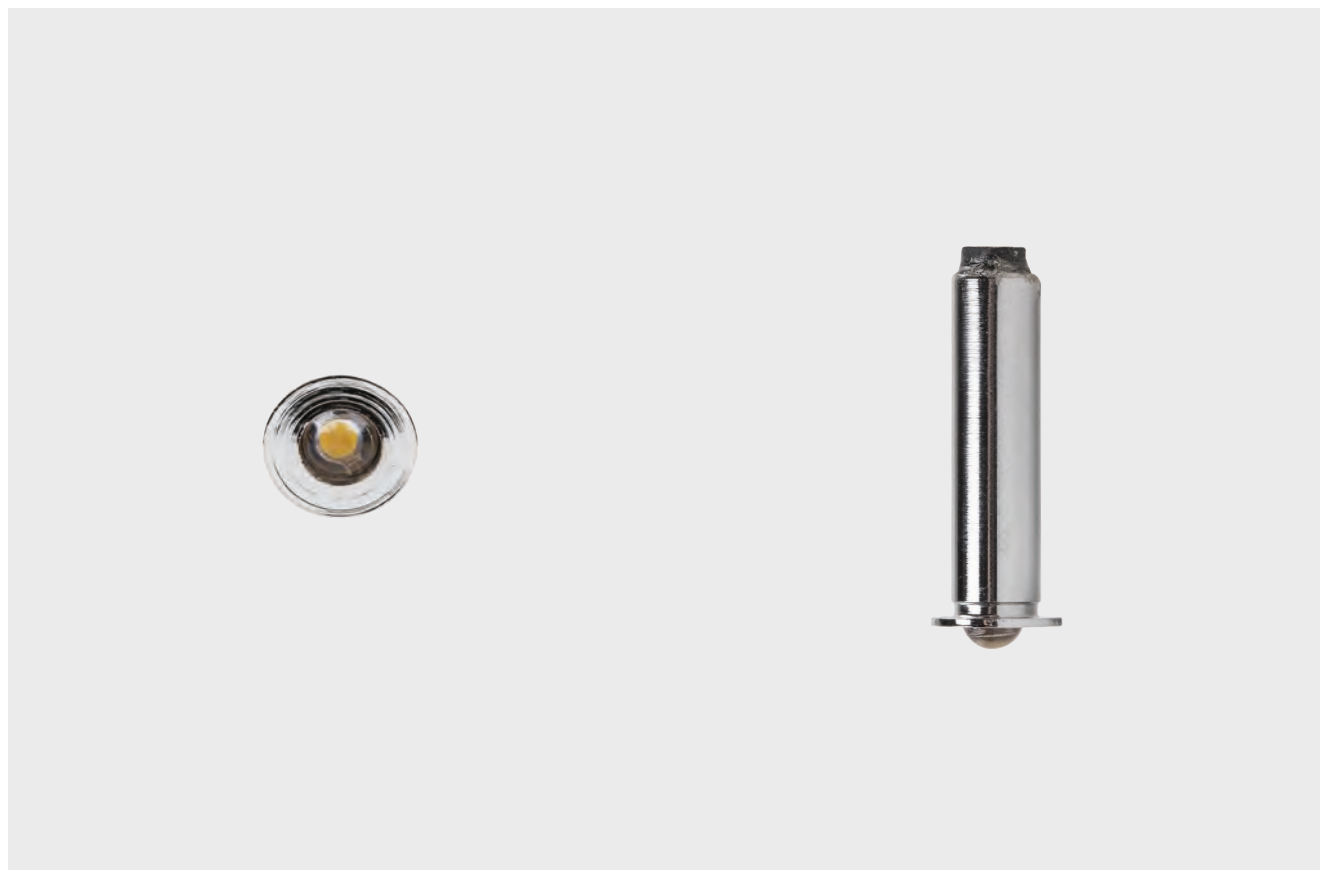

Installation

Ceiling recessed luminaire for indoor installation.

Technical description

Body and front ring, made of machined aluminum, natural or black anodized; chrome finish or painted with polyester powder also available.

High quality mid-power LED.

Electrical features

Remote power supply not included.
Class III device.

Source type

Luminaire wattage

Colour temperature

CRI

Beam

Driver

Input

Protection class

IP rating

Weight

Dimensions

Power LED

0.5W

3000K - 4000K - 5000K

80 - on request 90

40°

Remote

12V DC

CLIII


IP20

0.05 kg


Ø 10 x h 30

Luxy Pico 0.5W

CE IP20 CLIII 

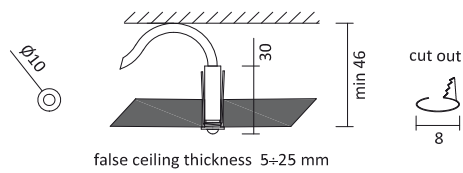

40° 0.5W

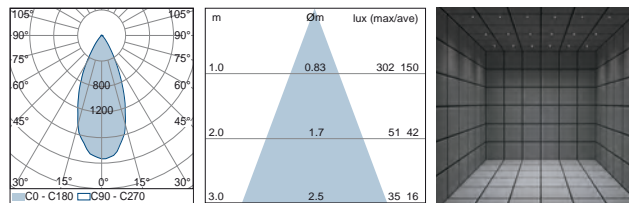

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYPF11W	0.5	40°	22	3000	80
ALUXYPF11N	0.5	40°	25	4000	80
ALUXYPF11C	0.5	40°	30	5000	80

+ Finishing codes

Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
CF	Chrome finish
BP	Black powder painted
WP	White powder painted
GP	Gold finish

+ Power supply codes

Code	Power supply type
ST012V	Standard - 12V
DI012V	DIM1-10 - 12V
DA012V	DIM DALI - 12V