



# APAKURA 2

DECORATIVE  
LIGHTING

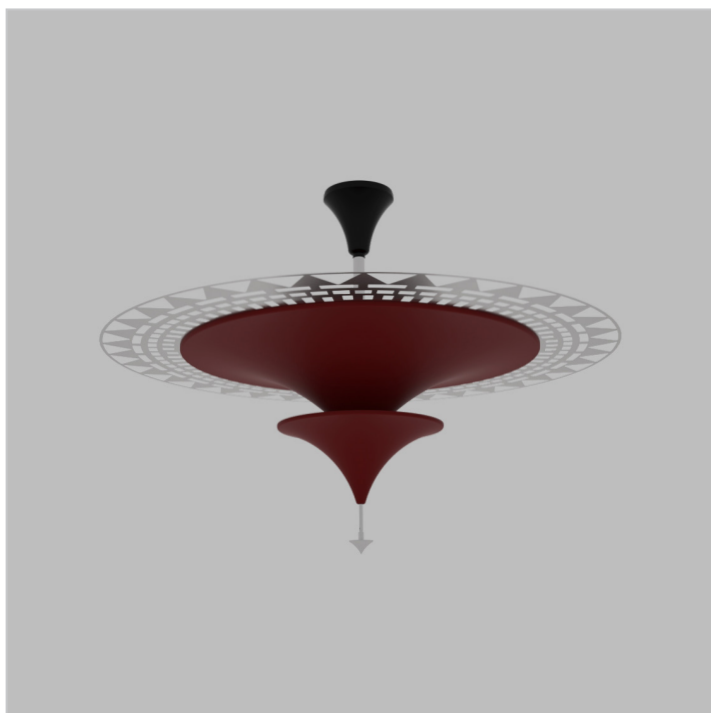

Apakura 2 is a decorative chandelier for indoor installation.

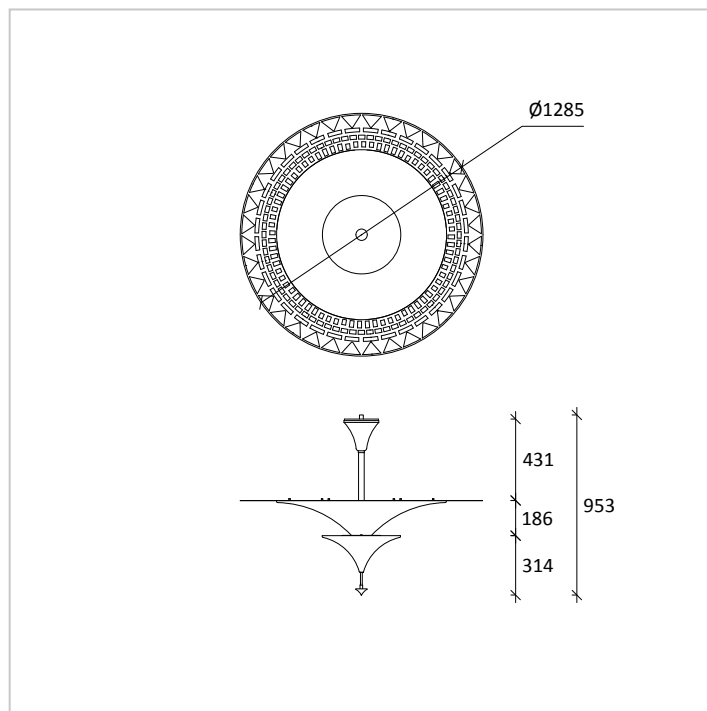

CE   CLI IP 54

## PRODUCT DESCRIPTION

**Main body:** made of 2 thermoformed acrylic sheets shaped as stretched cones, a wide range of finishing are available.

**Decorative external ring:** made of aluminium sheet and realized with laser cutting and finished with black polyester powder.

**Hanging system:** made of a 30 mm diameter stainless steel tube and a machined plate.

**Wiring:** Power supply integrated in the rear compartment.

**Dimming options:** Standard Switch ON/OFF, dimmable 1-10 and dimmable DALI.

## TECHNICAL DATA

Colour temperature	2700 K
Luminous flux	-
Power supply	40 W - 7 W *
Luminous efficacy	~ 78 lm/W
Colour index	85 CRI
Optics	Diffuse
Driving current	-
Input	230 V 50-60 Hz

\* The two different powers refer to different sources: the 40 W refer to the bigger pending cone, the 7 W to the projector integrated in the small pending cone.

### Tassoni & Pesenti

Head Office

address - Via Montegrappa, 32, 20080 Albairate (MI) Italy

web site - [www.tplight.it](http://www.tplight.it)

mail - [info@tplight.it](mailto:info@tplight.it)

tel/fax - +39.02.97162704

Registered Office

address - Viale E. Forlanini, 23, 20134 Milano (MI) Italy

C.F. & P.I. 07703840962

N° REA 1976624

TASSONI  
&  
PESENTI