
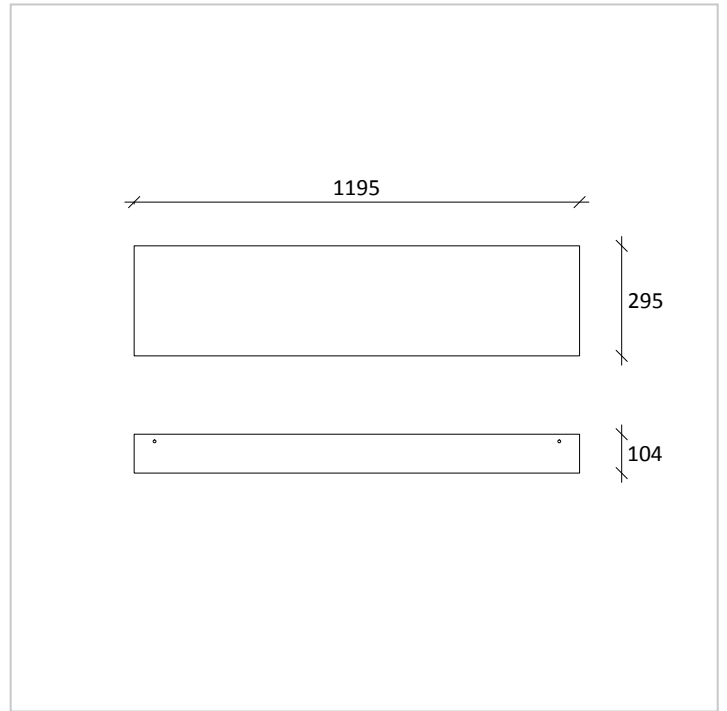


BASIC 30X120

GENERAL
LIGHTING

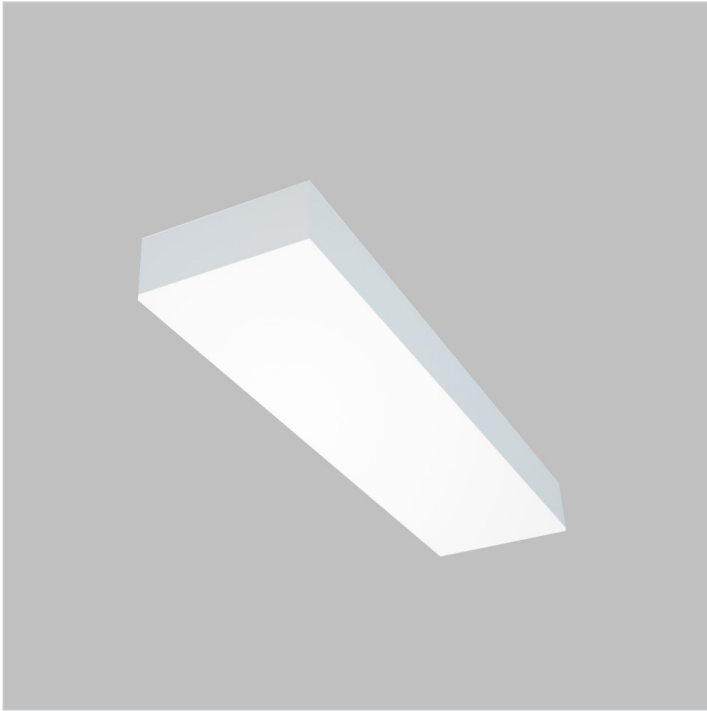

Basic 30X120 is a light for general lighting, for recessed and ceiling installation and specialized for offices and meeting rooms.

CE CLI/II IP 44

PRODUCT DESCRIPTION

Body: made of machined steel sheet or aluminium sheet anodized or painted with polyester powder.

Front closure: made of opal polycarbonate with high transmittance, or request are available in standard no glare polycarbonate and UGR microprism polycarbonate compliant to video-terminal working area.

Seals: made in silicone anti-age.


Screws: made of stainless steel AISI 304.

Wiring: 2P + E connector on board, power supply and other accessorize box.


Dimming options: Standard Switch ON/OFF, dimmable 1-10 and dimmable DALI.

PHOTOMETRY

Microprism



Opal no glare



TECHNICAL DATA

| | |
|--------------------|----------------------------|
| Colour temperature | 3000 K - 4000 K - 5000 K |
| Luminous flux | 4320 lm * |
| Power supply | 57 W |
| Luminous efficacy | ~ 76 lm/W * |
| Colour index | 90 CRI * |
| Optics | Microprism - Opal no glare |
| Driving current | 500 mA |
| Input | 230 V 50-60 Hz |

* Values are referred to 4000K

Tassoni & Pesenti

Head Office

address - Via Montegrappa, 32, 20080 Albairate (MI) Italy

web site - www.tplight.it

mail - info@tplight.it

tel/fax - +39.02.97162704

Registered Office

address - Viale E. Forlanini, 23, 20134 Milano (MI) Italy

C.F. & P.I. 07703840962

N° REA 1976624

TASSONI
&
PESENTI