
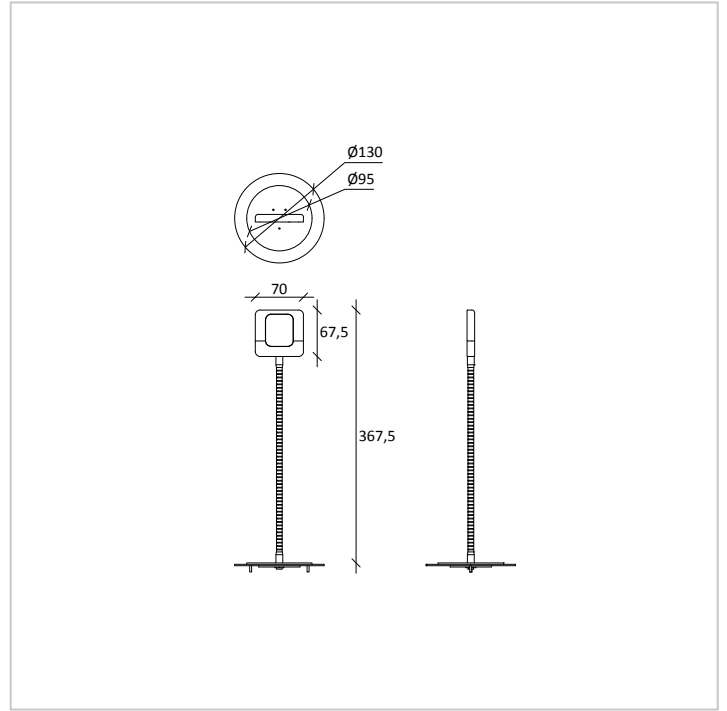


FLEXY FLAT

READING
LAMP

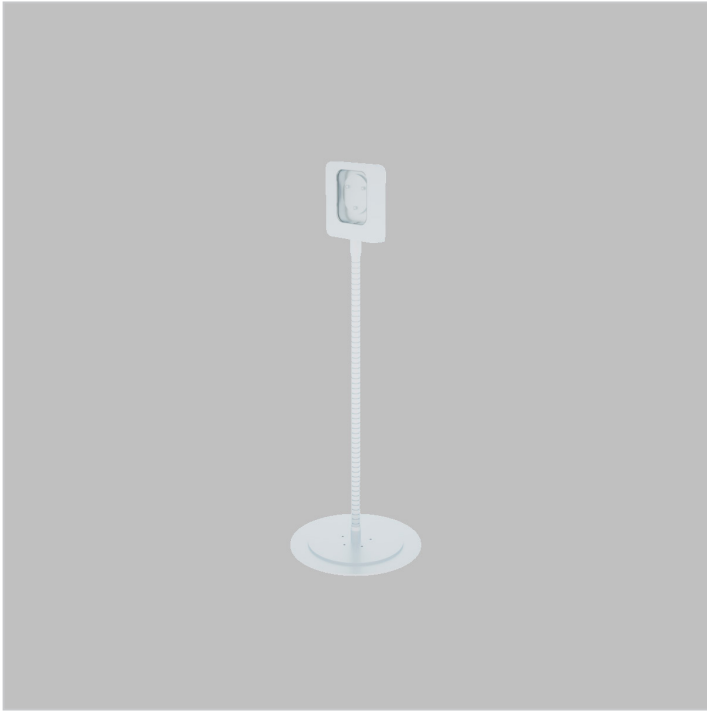

Flexy Flat is a wall reading light luminaire. Thanks to the flexibility of the body it is extremely adjustable for every inclination.

CE CLI IP 20

PRODUCT DESCRIPTION

Adjustable: made of brass spring surrounded by an external black covering; this allows the lighting beam to be oriented in any direction. Chrome finished brass round plate for wall fixing. Machined aluminium with chrome finishing projector body.


Front closure: made of tempered glass.

Screws: made of stainless steel AISI 304.

Wiring: standard equipment H05RN-F with double cable 2x0,75mm², 50cm length.

Dimming options: Standard Switch ON/OFF, dimmable 1-10 and dimmable DALI.

PHOTOMETRY



TECHNICAL DATA

Colour temperature	3000 K - 4000 K - 5000 K
Luminous flux	240 lm *
Power supply	3 W
Luminous efficacy	~ 80 lm/W *
Colour index	85 CRI *
Optics	Diffuse
Driving current	24 V
Input	230 V 50-60 Hz

* Values are referred to 4000K

Tassoni & Pesenti

Head Office

address - Via Montegrappa, 32, 20080 Albairate (MI) Italy

web site - www.tplight.it

mail - info@tplight.it

tel/fax - +39.02.97162704

Registered Office

address - Viale E. Forlanini, 23, 20134 Milano (MI) Italy

C.F. & P.I. 07703840962

N° REA 1976624

TASSONI
&
PESENTI