


# LUXY ADJUSTABLE

ARCHITECTURAL  
DOWNLIGHT



Luxy Adjustable is a downlight for indoor and outdoor installations.

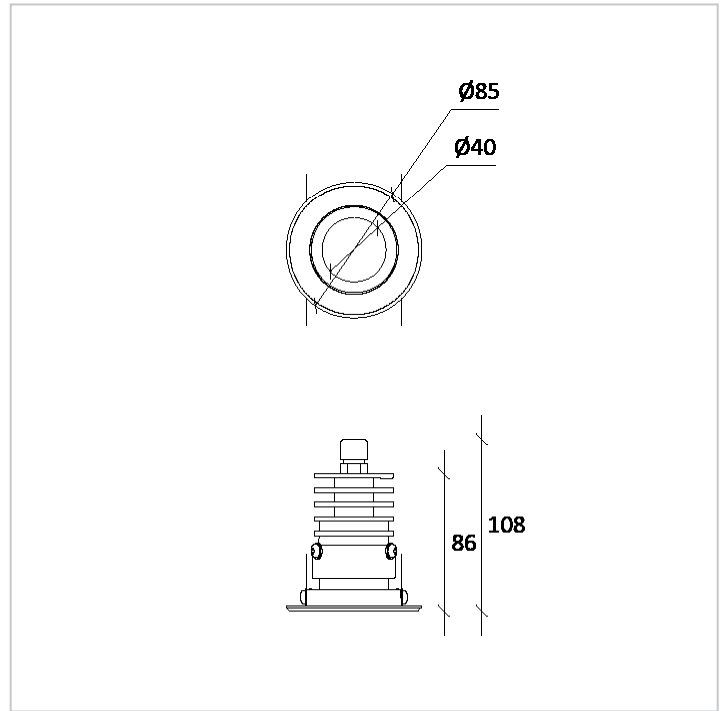

CE CLIII IP 43/54/65

## PRODUCT DESCRIPTION

**Dissipation body:** made of anodized machined aluminium.

**Circular shape front ring:** realized in machined aluminium and available in a wide range of finishing: anodized/chrome plated/painted: black, white, or gold/ aluminium polished/brushed steel.

**Front closure:** made of tempered glass; clear or frosted.

**Springs:** harmonic steel springs for installation in false ceiling.

**O-ring:** made of silicone for installation in recessed housing.

**Seals:** made in silicone anti-age.

**Screws:** made of stainless steel AISI 304

**Wiring:** standard equipment H05RN-F bipolar cable 2X0,75mm<sup>2</sup>, 50cm length.

PG7 plastic cable gland (nickel-plated brass and stainless steel on request).


**Dimming options:** Standard Switch ON/OFF, dimmable 1-10, dimmable DALI.

## TECHNICAL DATA

Colour temperature	2700 K - 3000 K - 4000 K - 5000 K
Luminous flux	375 lm - 515 lm - 685 lm - 842 lm - 970 lm *
Power supply	3,8 W - 5,5 W - 7,8 W - 10,2 W - 12 W
Luminous efficacy	~ 98,7 lm/W *
Colour index	90 CRI *
Optics	21° - 45° - 65°
Driving current	350 mA - 500 mA - 700 mA - 900 mA - 1050 mA
Input	220 - 240 V 50 Hz

\* Values are referred to 2700K

## PHOTOMETRY

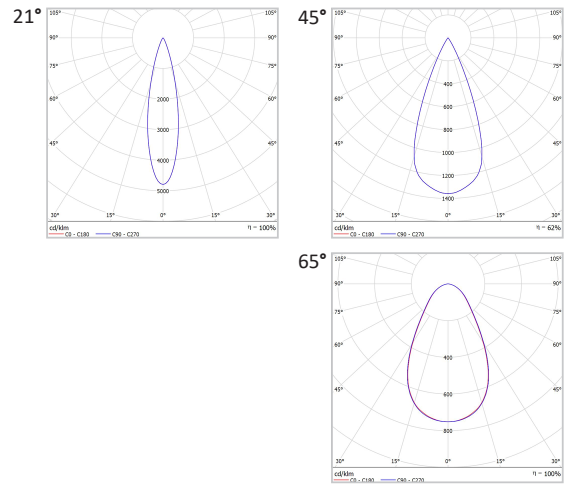

Tassoni & Pesenti

Head Office

address - Via Montegrappa, 32, 20080 Albairate (MI) Italy

web site - [www.tplight.it](http://www.tplight.it)

mail - [info@tplight.it](mailto:info@tplight.it)

tel/fax - +39.02.97162704

Registered Office

address - Viale E. Forlanini, 23, 20134 Milano (MI) Italy

C.F. & P.I. 07703840962

N° REA 1976624

TASSONI  
&  
PESENTI