
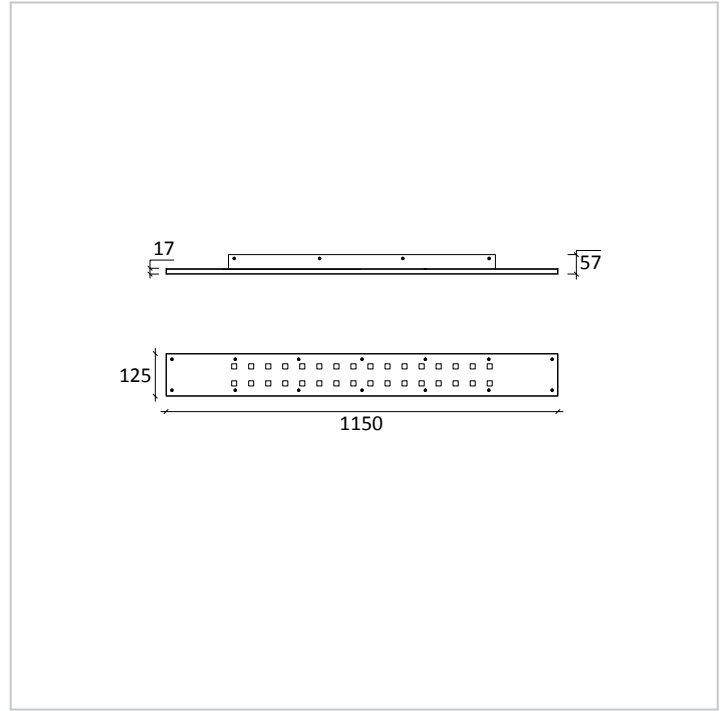


MODULA LC 32

GENERAL
LIGHTING

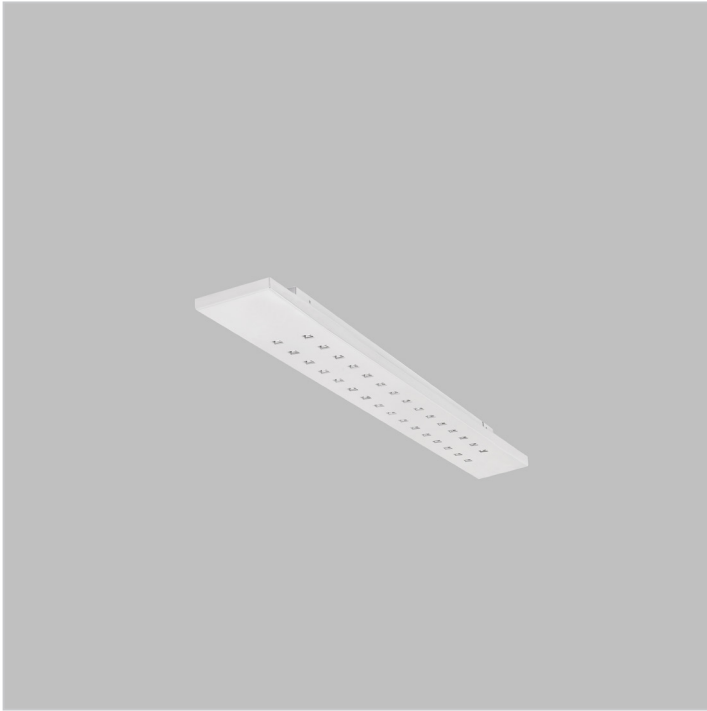

Modula LC 32 is a light for general lighting, for ceiling and suspended installation, specialized for offices and meeting rooms.

CE **CLI IP 20**

PRODUCT DESCRIPTION



Body and wiring box: made of machined steel sheet or aluminium sheet anodized or painted with polyester powder.

Screws: made of stainless steel AISI 304.

Wiring: 2P + E connector on board, power supply and other accessorize box.

Dimming options: Standard Switch ON/OFF, dimmable 1-10 and dimmable DALI.

PHOTOMETRY



TECHNICAL DATA

Colour temperature	3000 K - 4000 K - 5000 K
Luminous flux	2900 lm - 3850 lm *
Power supply	36 W - 51 W
Luminous efficacy	~ 80 lm/W *
Colour index	90 CRI *
Optics	Microprism - Opal no glare
Driving current	500 mA
Input	220 - 240 V 50-60 Hz

* Values are referred to 4000K

Tassoni & Pesenti

Head Office
address - Via Montegrappa, 32, 20080 Albairate (MI) Italy
web site - www.tplight.it
mail - info@tplight.it
tel/fax - +39.02.97162704

Registered Office

address - Viale E. Forlanini, 23, 20134 Milano (MI) Italy
C.F. & P.I. 07703840962
N° REA 1976624

TASSONI
&
PESENTI