
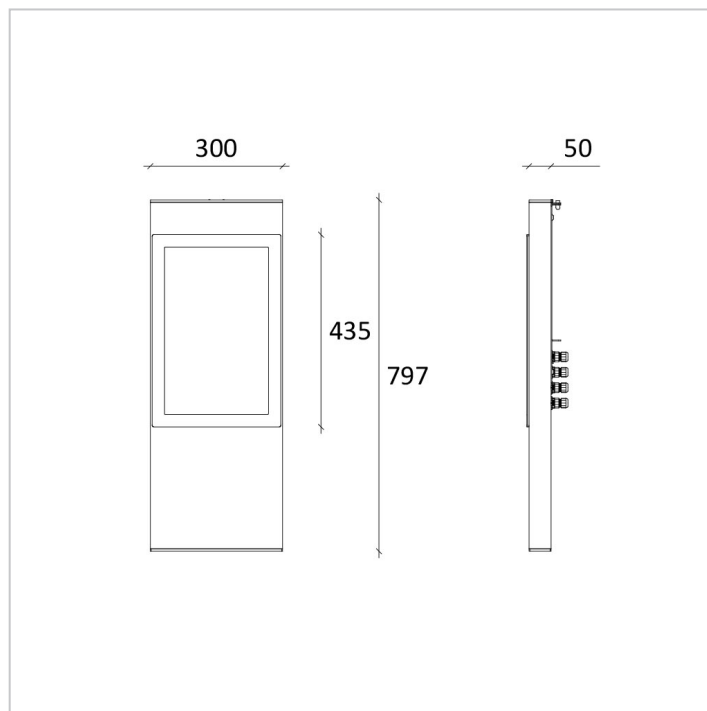


NY WALL

URBAN
LIGHTING

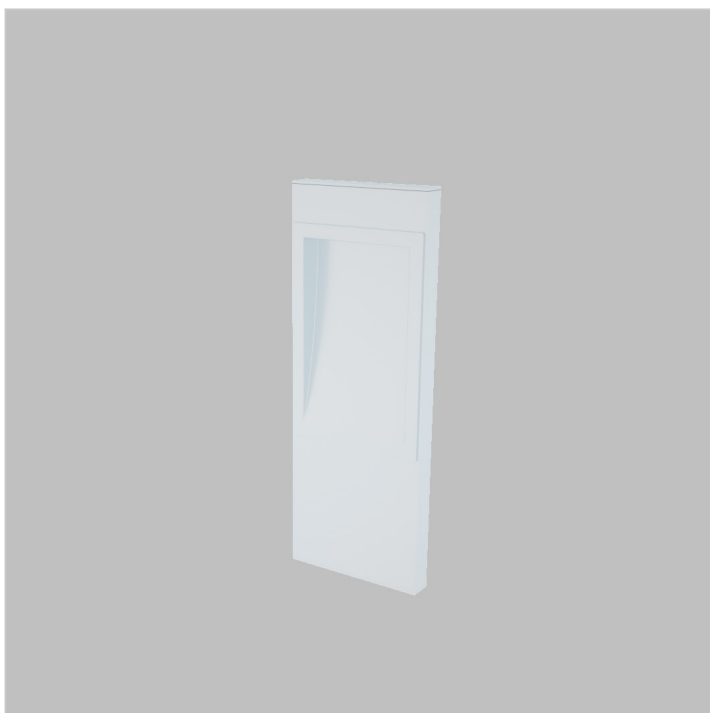

NY Wall, as the name, is for wall mounting, for outdoor application, suitable for pathways and colonnades.

CE CLI IP 65

PRODUCT DESCRIPTION

Body: made of extruded aluminium, painted with polyester powder after phosphochromatizing treatment; on request certified marine grade protection.

Front diffuser: made of die-cast aluminium painted as the body.

Top and bottom: made of hot-dip galvanized steel and painted like the body.

Seals: made in silicone anti-age.


Screws: made of stainless steel AISI 304

Wiring: cable connection in the rear compartment through a door, cable input from bottom. Wall connector for a faster operations. Power supply integrated in the rear compartment.

Dimming options: Standard Switch ON/OFF, dimmable 1-10 and dimmable DALI.

PHOTOMETRY

Asymmetric



TECHNICAL DATA

Colour temperature	3000 K - 4000 K - 5000 K
Luminous flux	750 lm - 1000 lm - 1400 lm - 1500 lm - 2000 lm - 2800 lm *
Power supply	8,5 W - 12,5 W - 17,5 W - 17 W - 25 W - 35 W **
Luminous efficacy	~ 80 lm/W *
Colour index	90 CRI *
Optics	Asymmetric diffusing
Driving current	350 mA - 500 mA - 700 mA
Input	220 - 240 V 50-60 Hz

* Values are referred to 4000K

** From 8,5W to 17,5W are referred to 8 LED PCB; from 17W to 35W is referred to 16 LED PCB.

Tassoni & Pesenti

Head Office

address - Via Montegrappa, 32, 20080 Albairate (MI) Italy

web site - www.tplight.it

mail - info@tplight.it

tel/fax - +39.02.97162704

Registered Office

address - Viale E. Forlanini, 23, 20134 Milano (MI) Italy

C.F. & P.I. 07703840962

N° REA 1976624

TASSONI
&
PESENTI