


PLTR 71

ARCHITECTURAL
SPOTLIGHT

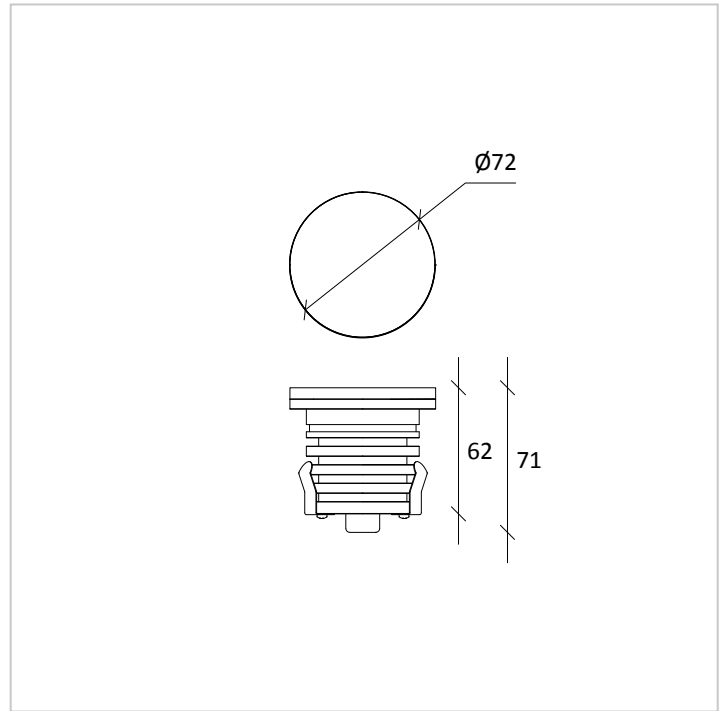

PLTR 71 is a recessed trimless spot light with a full LED and optical choice. Thanks to a wide range of accessories it can be installed in interior and exterior wall, floor and ceiling.

CE F X CLIII IP 67

PRODUCT DESCRIPTION

Dissipation body: made of machined and anodized aluminium.

Front closure: made of serigraphed (for a low glaring impact) tempered glass.

Seals: made in silicone anti-age.


Screws: made of stainless steel AISI 304

Wiring: standard equipment H05RN-F bipolar cable 2X0,75mm².

PG7 plastic cable gland (stainless steel on request), power supply to be inside the recessed housing.

Dimming options: Standard Switch ON/OFF, dimmable 1-10 and dimmable DALI.

PHOTOMETRY

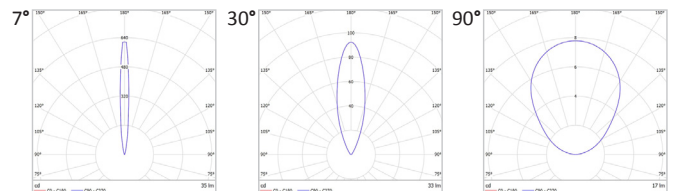

TECHNICAL DATA

Colour temperature	2700 K - 3000 K - 4000 K - 5000 K - RGB
Luminous flux	350 lm *
Power supply	5,5 W
Luminous efficacy	~ 60 lm/W *
Colour index	90 CRI *
Optics	7° - 30° - 90°
Driving current	500 mA
Input	220 - 240 V 50-60 Hz

* Values are referred to 2700K

ACCESSORIES

Recessed housing: made of machined aluminium sheet.



EUROPE REPRESENTATIVE

Tassoni & Pesenti

Production and Working Office

address - Via Montegrappa, 32, 20080

Albairate (MI) Italy

web site - www.tplight.it

mail - info@tplight.it

tel/fax - +39.02.9465569

Registered Office

address - Viale E. Forlanini, 23,

20134 Milano (MI) Italy

C.F. & P.I. 07703840962

N° REA 1976624



MIDDLE EAST & AFRICA REPRESENTATIVE

Newline Mea

Working Office

address - Al Barsha, Rania Business Centre

Next to Mall of the Emirates, Office - 506

P.O. Box: 3345, Dubai - UAE

web site - www.newlinemea.com

mail - info@newlinemea.com

 **newline**

mob - +97155.2822723

tel - +97144.316621

fax - +97144.318134