


Sting is a residential and urban decorative lighting fixture.

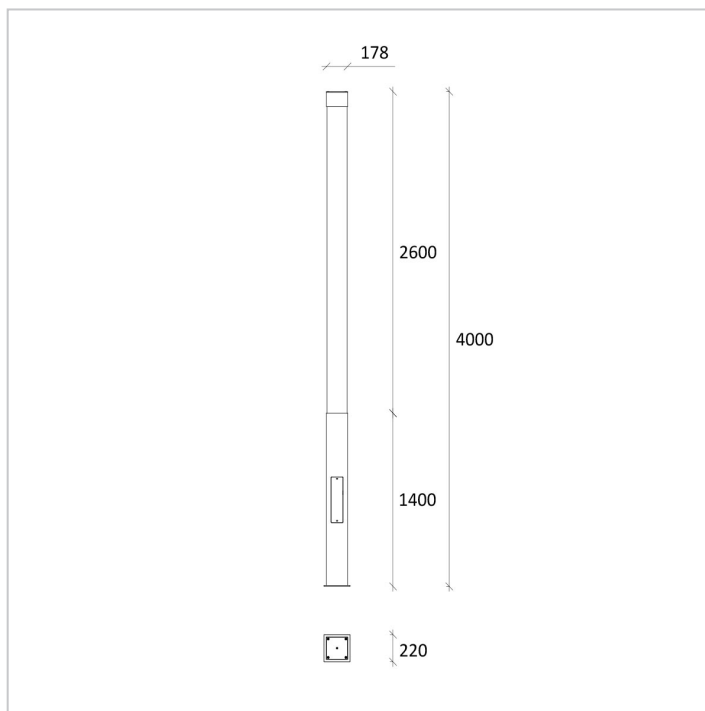

PRODUCT DESCRIPTION

Body: made of extruded aluminium, painted with polyester powder after phosphochromatizing treatment; on request certified marine grade protection.

Diffuser: made of PMMA.

Base plate: made of hot-dip galvanized steel and painted like the body, with double protection.

Seals: made in silicone anti-age.

Screws: made of stainless steel AISI 304

Wiring: cable connection in the rear compartment through a door, cable input from bottom. Wall connector for a faster operations. Power supply integrated in the rear compartment.

Dimming options: Standard Switch ON/OFF and dimmable 1-10.


TECHNICAL DATA

Colour temperature	3000 K - 4000 K - 5000 K - RGB
Luminous flux	4000 lm *
Power supply	78 W
Luminous efficacy	~ 51 lm/W *
Colour index	< 80 CRI *
Optics	Diffuse
Driving current	700 mA
Input	220 - 240 V 50-60 Hz

* Values are referred to 4000K

PHOTOMETRY

Asymmetric



ACCESSORIES

Plinth for concrete: made of anodized aluminium or stainless steel on request.

